# WELLMATICS

## PHIRE AWAY Frac Plug

### **OVERVIEW**

The PHIRE AWAY Frac Plug is an ultrashort dissolvable frac plug that provides reliable zonal isolation during hydraulic fracturing. A compact all-metal design puts less material in the well, while the ductile metal sealing technology eliminates leak paths. Geometric sections are optimized for predictable dissolution, eliminating mill times.

#### **PRODUCT HIGHLIGHTS**

- Full metal seal to ensure no leaks
- Large bore and short length reduces material
- Interlocking slip design to resist backflow
- Predictive Dissolution in both fresh and saltwater
- Ball Drop or Ball in Place Operation
- Coating available for high temperature/high salinity environments

### SPECIFICATIONS



# **FEATURES**

10.000 PSI **Differential Pressure Rating** 


#### **350 Degrees F** Temperature Rating

99.4% Dissolvable Material




PHIRE AWAY

Casing Size	OD	ID	Set Length	Pressure Rating	Temp Rating
4.50" 11.6 - 13.5#	3.64"	1.1"	3.5"	10,000 PSI	350 °F
5.0" 18 - 21.4#	3.85"	1.2"	3.5"	10,000 PSI	350 °F
5.5" 20 - 23#	4.34"	1.38"	3.5"	10,000 PSI	350 °F
6.0" 22.3#	4.85"	1.48"	3.5"	10,000 PSI	350 °F

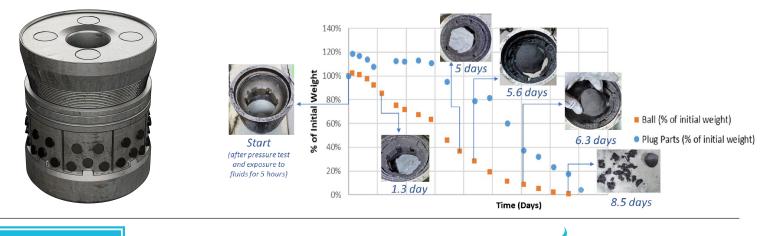



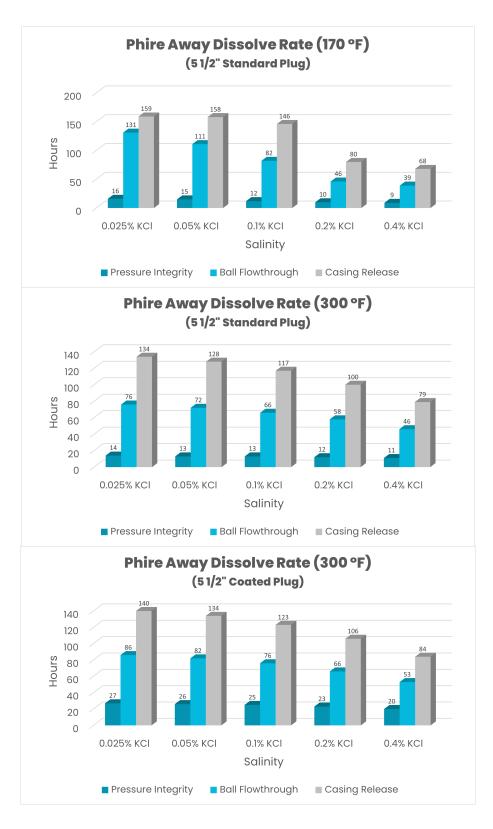

WELLMINTICS